



The SN-115 is a versatile high efficiency 2-way loudspeaker featuring a 15" low frequency speaker with a 3" voice coil and a 1" exit compression driver with 1.75" titanium diaphragm coupled to a constant directivity horn. The SN-115 is rated at 1000 W program power handling. The high frequency driver protection and crossover network enhances efficiency and provides excellent long-term reliability.

The cabinet is a high pressure injection molded high density polypropylene cabinet with a molded handle and stand mounting socket. The internal design provides extensive wall reinforcing for minimum vibration. The SN-115 provides clear, punchy sound and excellent long-term dependability needed in today's stand-alone full-range loudspeaker applications.




SPECIFICATIONS

RMS Power Handling	500 W
Program Power Handling	1000 W
On-axis Frequency Range	45-16 KHz
Connectors	Dual paralleled Speakon
Nominal Impedance	8 ohm
On-axis Sensitivity 1W/1m	98 dB SPL
Rated Peak SPL at Full Power	131 dB
Horizontal Coverage (Normal-6dB)	105 deg.
Vertical Coverage (Normal-6dB)	75 deg.
Enclosure Material	High density polypropylene
Color	Black
Dimensions (H x W x D)	28.7 x 19.5 x 15.4 inches
Net Weight	46.2 pounds
Shipping Weight	51.7 pounds

FEATURES

- Two-way vented loudspeaker system.
- 15" low frequency speaker.
- 1.75" compression driver with constant directivity horn.
- 500 W RMS power handling.
- High density polypropylene enclosure.

FREQUENCY RESPONSE

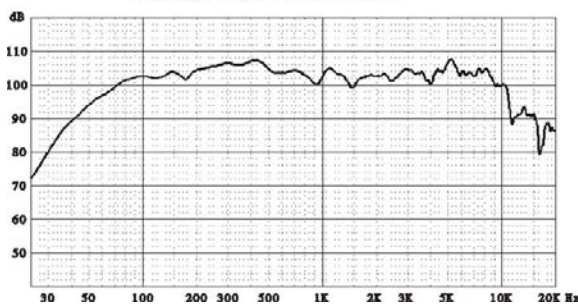

IMPEDANCE

