

Superlux[®]

ECO-H6A

Back Electret Condenser Microphone

Description

The ECO-H6A is a versatile back electret condenser microphone with many uses. With a traditional look and excellent electroacoustic performance, it is ideal for vocal and stage sound reinforcement as well as instrument or sampling recording.

Features

- Optimal response in lower frequencies with enhanced mid-high frequency response
- High SPL rating and wide dynamic range
- Transformerless output
- High sensitivity and wide frequency response with low distortion



**soft-side
protective case**

Specifications

- Type: Back Electret Condenser Microphone
- Polar Pattern: Cardioid
- Frequency Response: 40~18000Hz
- Sensitivity: -33dBV/pa (22.4mv/pa)
- Rated Impedance: 200Ω
- Max. SPL: 136 dB (THD ≤ 1% 1000Hz)
- Power Supply Voltage: Phantom 36~52V
- Current Consumption: 3mA
- Dimensions: Φ2.1"x6.7"
- Net Weight: 8.8oz




ECO-H6A

ECO-H6A


Accessories

- Swivel adaptor
- Protective soft-side case
- Optional HM-26A Shock Mount available

Polar Pattern



Frequency Response

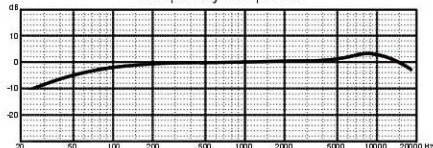

Avlex Corporation

9900 Pflumm #19

Shawnee Mission, KS 66215 USA

Tel:(913)906-9216 Toll Free: (877) 447-9216

Fax: (913) 906-9225 E-mail:sales@avlex.com

Webpage:www.avlex.com

Midland Canada

385 Wilsey Road

Fredericton NB

CANADA E3B5N6

Tel: (800) 517-0003

Webpage: www.midland-canada.com